

STAINLESS STEEL REPAIR CLAMP WITH DCI JAW- PN 10/16

From DN50 to DN300

Repairs clamp standard: comply with EN545

Coating standard: EN30677


Test standard: EN12266-1

Working pressure and Temperature size

OD50 to OD300, Working pressure PN10/PN16

Temperature from -10°C to 120°C for EPDM gasket

Temperature from -10 °C to 82°C for NBR gasket.

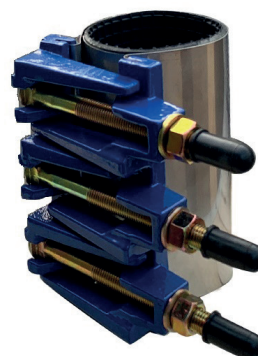

Suitable for potable water, neutral liquids and sewage
WRAS approved is available upon request.

Material specification

SR. NO.	Name	Material
1	Lugs	Ductile Iron
2	SS Band	SS304
3	Gasket	EPDM
4	Bolts and Nuts	CS or SS

SIZE	OD RANGE	LENGTH	BOLTS	PRESSURE
DN50	60-67	150/200	M16x180	PN10/16
DN80	88-98	50/200/300	M16x180	PN10/16
DN80	95-105	50/200/300	M16x180	PN10/16
DN100	108-118	50/200/300	M16x180	PN10
DN100	115-128	150/200/300	M16x180	PN10
DN150	158-172	200/300	M16x180	PN10
DN150	168-182	200/300	M16x180	PN10
DN200	217-229	200/300	M16x180	PN10
DN200	225-240	200/300	M16x180	PN10
DN250	243-260	200/300/450	M16x180	PN6/10
DN250	270-288	200/300/450	M16x180	PN6/10
DN300	313-336	200/300/450	M16x180	PN6/10
DN300	340-360	200/300/450	M16x180	PN6/10